



CLAMP DETAIL

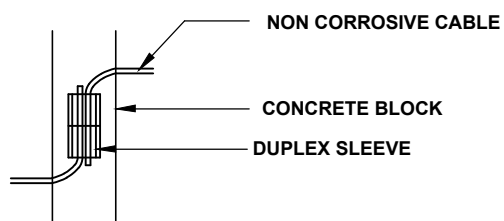


CONNECTION TYPE #1

GROUT SEAM WITH 4000 PSI GROUT

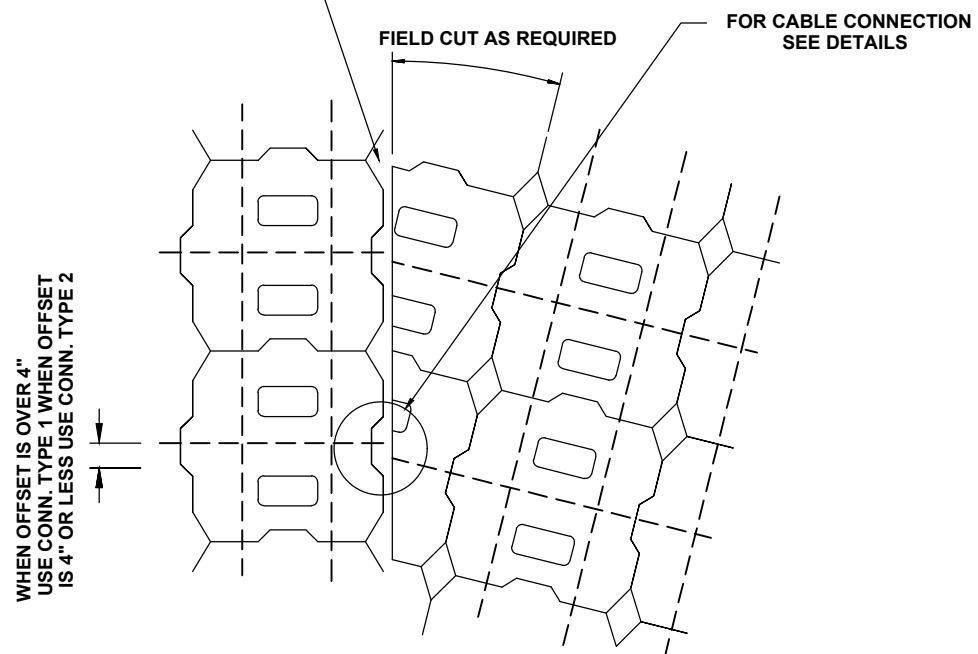

ANGLE MAT CONNECTION

NOTES:
ALL CABLE CONNECTIONS ARE TO BE MADE WITHIN THE INTERSECTIONAL SPACE BETWEEN BLOCKS.
CABLE CONNECTIONS ARE NOT TO PROTRUDE ABOVE MAT SURFACE.

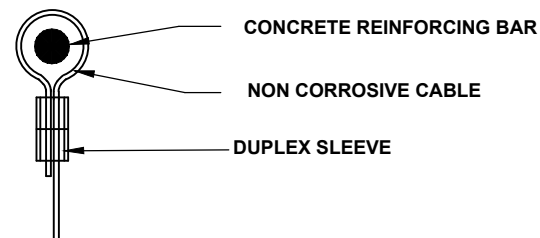

CONNECTION TYPE #2



38200 LA Hwy. 16
Denham Springs, LA 70706
1-800-575-7293
www.shoretec.com

Client:

Scale:
N.T.S.

File Name:

Title:

**SHOREBLOCK® BD SERIES
FEMALE CONNECTION OF MATS**

Project No:

Drawing No:
5

No.	Date	Revision	By

DISCLAIMER
THE INFORMATION CONTAINED HEREIN HAS BEEN COMPLIED BY SHORETEC® L.L.C AND TO THE BEST OF OUR KNOWLEDGE, ACCURATELY REPRESENTS THE SHORETEC® PRODUCT USE IN THE APPLICATIONS WHICH ARE ILLUSTRATED. FINAL DETERMINATION OF THE SUITABILITY FOR THE USE CONTEMPLATED AND ITS MANNER OF USE ARE THE SOLE RESPONSIBILITY OF THE USER. STRUCTURAL DESIGN AND ANALYSIS SHALL BE PERFORMED BY A QUALIFIED ENGINEER.

THIS DRAWING IS BEING FURNISHED FOR THIS SPECIFIC PROJECT ONLY. ANY PARTY ACCEPTING THIS DOCUMENT DOES SO IN CONFIDENCE AND AGREES THAT IT SHALL NOT BE DUPLICATED IN WHOLE OR IN PART, NOR DISCLOSED TO OTHERS WITHOUT THE CONSENT OF SHORETEC® L.L.C.